


ALU-Personnel-Lift PHC and PH

Standard lift

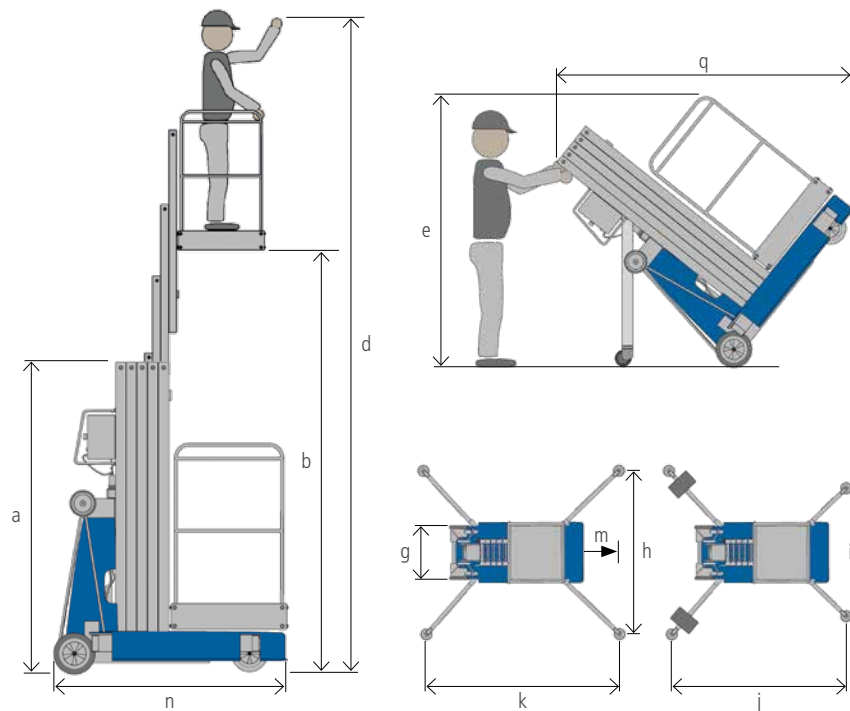

Model		PHC 650	PHC 800	PHC 940	PHC 1100	PHC 1200	PH 1300	PH 1400
Working height [m]	d	6.50	8.00	9.45	10.85	12.00	12.75	14.00
Platform height [m]	b	4.50	6.00	7.45	8.85	10.00	10.75	12.00
Payload [kg]		140	140	140	140	135	135	115
Dimensions								
Overall height [m]	a	1.98	1.98	1.98	1.98	1.98	2.30	2.77
Width [m]	g	0.77	0.77	0.77	0.77	0.77	0.77	0.77
Length [m]	n	1.31	1.33	1.37	1.43	1.44	1.44	1.44
Length tilted [m]	q	–	–	–	–	–	2.40	2.85
Height tilted [m]	e	–	–	–	–	–	1.98	1.95
Footprint* indoors [m]	h x k	1.25 x 1.26	1.41 x 1.39	1.53 x 1.50	1.74 x 1.78	2.04 x 2.05	2.18 x 2.17	2.29 x 2.25
Footprint* indoors with ballast/counter weights [m]	h x k	–	1.25 x 1.26	1.25 x 1.26	1.41 x 1.49	1.61 x 1.67	1.81 x 1.85	2.04 x 2.05
Footprint* outdoors [m]	h x k	2.04 x 1.95	2.43 x 2.28	2.73 x 2.55	3.24 x 3.10	3.67 x 3.47	3.67 x 3.47	3.90 x 3.67
Footprint* outdoors in front of wall [m]	i x j	1.25 x 1.62	1.41 x 1.86	1.53 x 2.05	1.74 x 2.46	2.04 x 2.79	2.18 x 2.85	2.29 x 3.00
Wall clearance [mm]	m	90	100	90	210	340	400	450
Net weight without attachments [kg]		256	278	300	332	356	385	433
Weight of ballast/counter weights [kg]		293	318	342	376	408	390	437
Extending speed approx. [sec]		28	26	21	26	26	35	40

Böcker Maschinenwerke GmbH

Lippestr. 69-73 | 59368 Werne

Fon +49 2389 79890

info@boecker.de

www.boecker.de

* Measurements up to the centre of the support plate (diameter 14 cm)

Subject to modifications to construction, weight and dimensions.

All rights reserved for changes.

Böcker
MY WAY TO THE TOP